
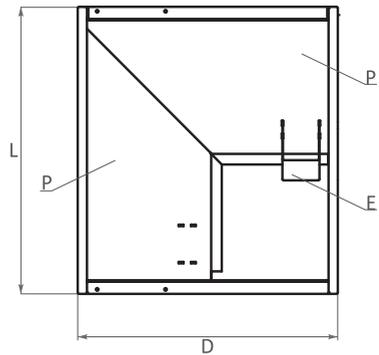


13.4. Technical parameters of fuel hopper FH 500-V2

		FH 500-V2
Capacity	l	500
Max /Min wood pellets load, \varnothing 6÷8 mm	kg	280÷300 / 15
Height H	mm	1260
Width L / Depth D	mm	772 / 730
Foundation	B, mm	53
Auger mounting opening	C, \varnothing mm	76
Auger holder	E	✓
Pellet-load hatch	F, mm	400 / 772
Hinges	G	✓
Inclination of guide plates	P	45°
Leveling feet	Z	✓
Weight	kg	71

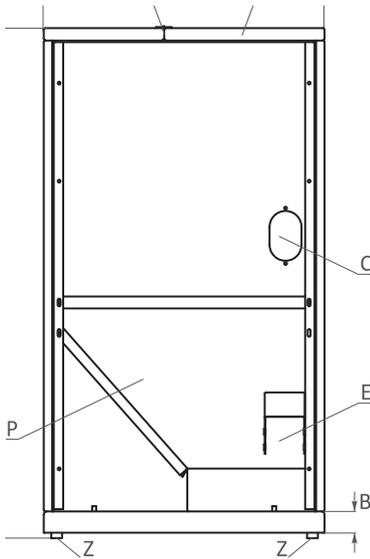

14. RECYCLING AND WASTE DISPOSAL

Submit all packaging material for recycling according to the local regulations and requirements. At the end of life cycle of each product its components are due to be disposed of in conformity with regulatory prescriptions.

According to Directive 2002/96/EC regarding electrical and electronic equipment waste, disposal thereof is required separately from the normal flow of solid household waste. Obsolete equipment shall be collected separately from other recyclable waste containing materials with adverse effect on

health and environment. Expired appliances must be collected separately from other recyclable waste containing substances hazardous to health and environment. Both metal and non-metal parts are sold out to licensed organizations for recyclable metal or non-metal waste collection. In any case they should not be treated as household waste.

