


LK 522 FilterBall

Technical data

Working temperature:	Min. -20°C/Max. +120°C
Max. working pressure:	1.6 MPa (16 bar)
Media 1:	Water - Glycol mixture max. 50%
Thread standard:	G - female thread
Mash opening, filter:	0.7 mm
Material, valve body:	DZR Brass EN 12165 CW625N
Material, filter element:	Stainless Steel
Material, cover sealing:	EPDM
Material, sealing:	P.T.F.E
Spindle sealing:	Two O-rings, EPDM

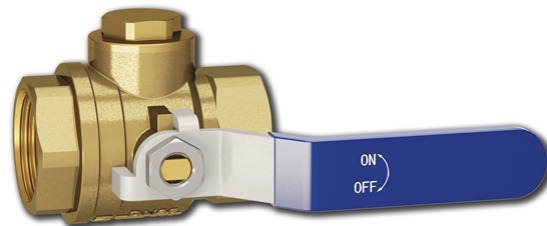


LK 522 FilterBall is a ball valve with an integrated filter suitable for heating, cooling and tap water systems.

The filter is easy to clean, just close the ball valve, unscrew the lid and remove the filter.

The valve requires no maintenance, but the installation should still be checked regularly.

LK 522 - Female thread

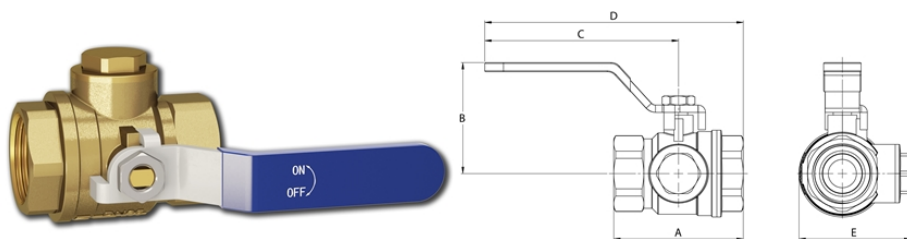

Article no.	Dim.	Kvs m ³ /h	A mm	B mm	C mm	D mm	E mm	Weight (kg)
182015	F ¾"	7.5	60	55	87	117	51	0.3
182016	F 1"	11	71	60	107	142	61	0.5
182017	F 1¼"	20	84	65	107	149	75	0.9
182018	F 1½"	33	93	80	143	189	88	1.3
182019	F 2"	55	119	90	143	203	105	2.1