

# LK 994 SafetyGroup

- Adjustable bracket
- Automatic shutdown when removing expansion vessel



## Technical Data


Working temperature:	5-110 °C
Ambient temperature:	5-60° C
Media 1:	Water - Glycol mixture max. 50%
Thread standard:	G - male thread
Material, valve body:	Brass EN 12165 CW617N

The LK 994 SafetyGroup is a safety group for heating systems.

It contains a floating air bleed valve, drain valve, manometer, shut-off valve and wall bracket. During disassembly of the expansion vessel, the shut-off valve automatically closes against the heating system. The bracket is adjustable to fit different expansion tank sizes.

Assembly of the LK 994 is done by the installer to adapt to the specific application. The details are provided with Teflon or O-ring sealing for the easiest possible assembly. The safety group can be rotated 360° for maximum flexibility.

## LK 994 - Male thread

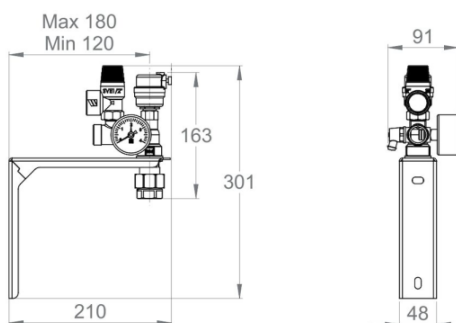

Article	Dim.	DN	Connection	Opening pressure	Discharge capacity	Weight (kg)
092371	M ¾"	15	¾"	0,3 MPa	89 kW	0.9



## Accessories & Spare parts

1



2



3



4



Article no.	Article	Position
095279	Manometer 50-4 bar M 1/4"	1
095491	Safety relief valve 0.3 MPa	2
095497	740-G10 Floating air vent	3
095498	Drainage valve 1/4"	4