




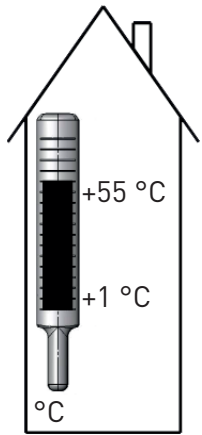

WITH CABLE

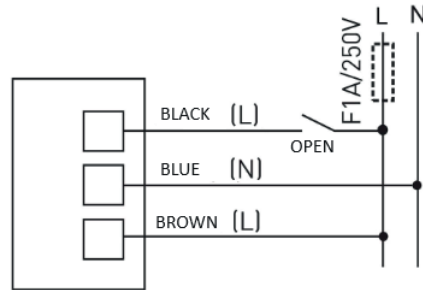

Amb. temp.



Diff. press. 0,6 MPa / 6 bar  
Max press. 3,2 MPa / 32 bar

# LK 527 MultiZone 2W

Zone Valve | Zonenventile | Vanne de zone | Valvola di zona |  
Vaihtoventtiili | Växelventil



RoHS 2002/96/CE  
WEEE 2003/11/CE



**LK ARMATUR AB**  
www.lkarmatur.se  
www.lkarmatur.com  
**LK ARMATUR DEUTSCHLAND GMBH**  
www.lkarmatur.de

## TECNICAL INFORMATION

Material - ventilhus valve  Ventilgehäuse  Corps de robinet	Mässing  Messing  Brass  Messing  Laiton EN 12165 CW617N, (MS58)
Ställmotor  Aktuator Actuator  Stellmotor  Moteur de réglage	230VAC, 50 Hz, IP 44
Gångtid  Gangtid  Operation time  Laufzeit  Durée de marche	Ca 12/30 sek
Anslutning med kabel  Tilslutning med kabel  Connection by cable  Anschluss mit Kabel  Raccord par câble	3-ledare  3-leder  stik wire  Leiter
Signalkontakt  Signal kontakt  Signal connector  Contact de signalisation	1-polig SPST   1-polet SPST   1-pole SPST   Signalkontakt ein-polig SPST   Une bobine SPST

